



COUNTRY FLOORS®

Quarry Pavers





UNGLAZED UNFLASHED

Earthen Tones

Unglazed Unflashed Quarry Pavers are the most uniform group of unglazed tiles and are characterized by solid colors ranging from light to dark.



Ivory



Grey



Beige



Scarlet



Red



Brown



Flashed Blend

UNGLAZED FLASHED

IRONSPOT - FLASHED ONLY - FLASHED BLEND


IRONSPOT



In Ironspot tiles, naturally occurring iron in the clay comes to the surface during flashing and forms distinctive flecks which creates a beautiful range of textures.



FLASHED ONLY

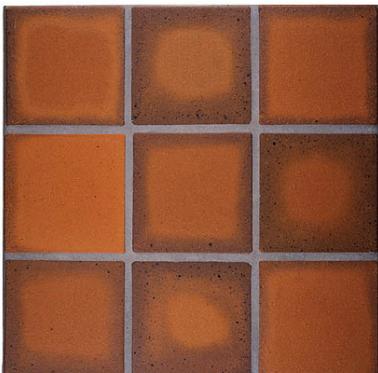

Warm, rich, variegations from the center of each tile, outward, form a darker frame, sometimes referred to as a "heart".



IRONSPOT + FLASHED ONLY FLASHED BLEND



Flashed Blend is the combination of Ironspot and Flashed Only tiles. Combining the two brings together the full range of tiles produced by a long, slow, firing and flashing process unique to beehive kilns. After firing, the tile is separated by hand depending on visual characteristics, into either Flashed Only or Ironspot ranges. Flashed Only and Ironspot are sold separately ~ or customers may order Flashed Blend which is the combination of both Ironspot and Flashed Only.



GLAZED

Rich Hues

Semi-gloss Glazed Quarry Pavers have a shaded range within each color highlighted by naturally occurring ironspots, with some colors exhibiting a richer concentration than others.



SATINS

Casual Elegance

The soft shades in this series will help create the inspiration for your next project. Satins ceramic tiles provide the strength and durability of traditional quarry pavers, versatile range of colors, sizes, decoratives, mosaics and trims. A shaded range of satiny, soft glazed colors that will occasionally include natural ironspots.


Create more than a concept ~ set the mood ~ with Satins.




Quarry Pavers

TILE & TRIM SIZES

Glazed & Unglazed Tile

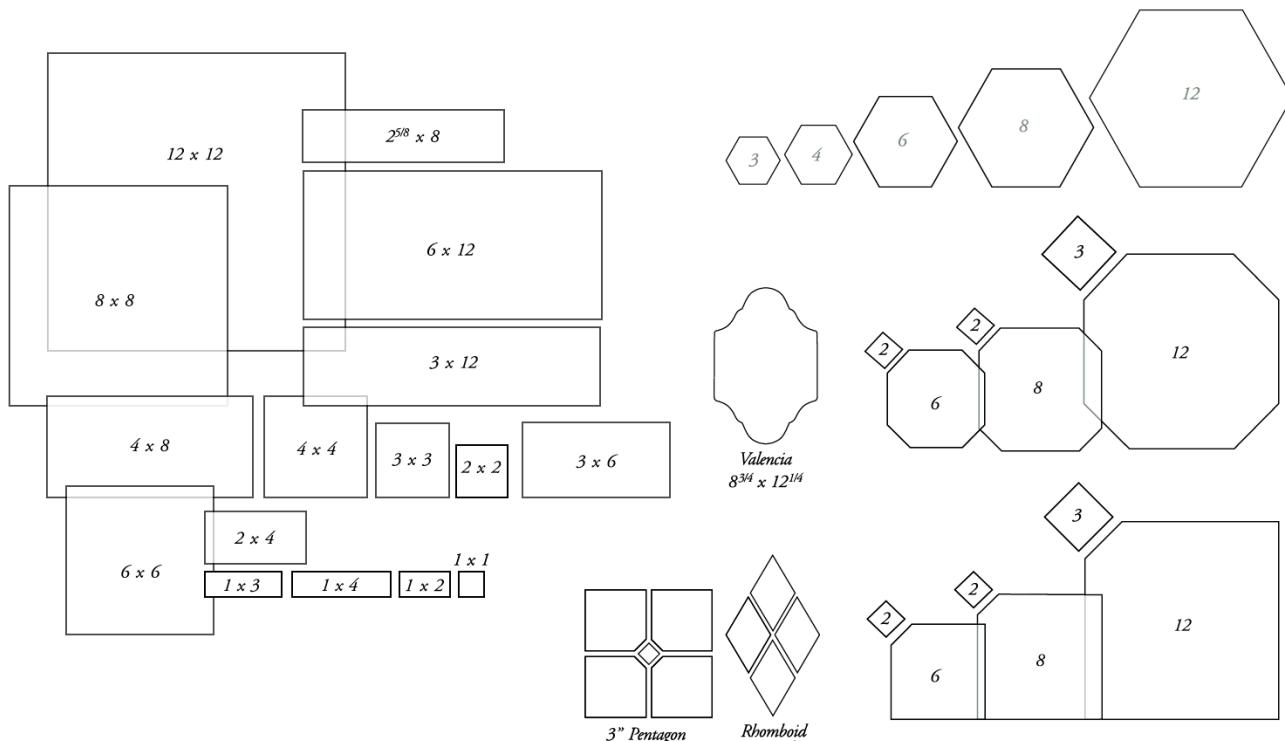


Quarry Pavers Compatibles - sizes to blend with Glassic Tile



Quarry Pavers Compatibles -
sizes to blend with Glassic Tile

Glazed & Unglazed Trim

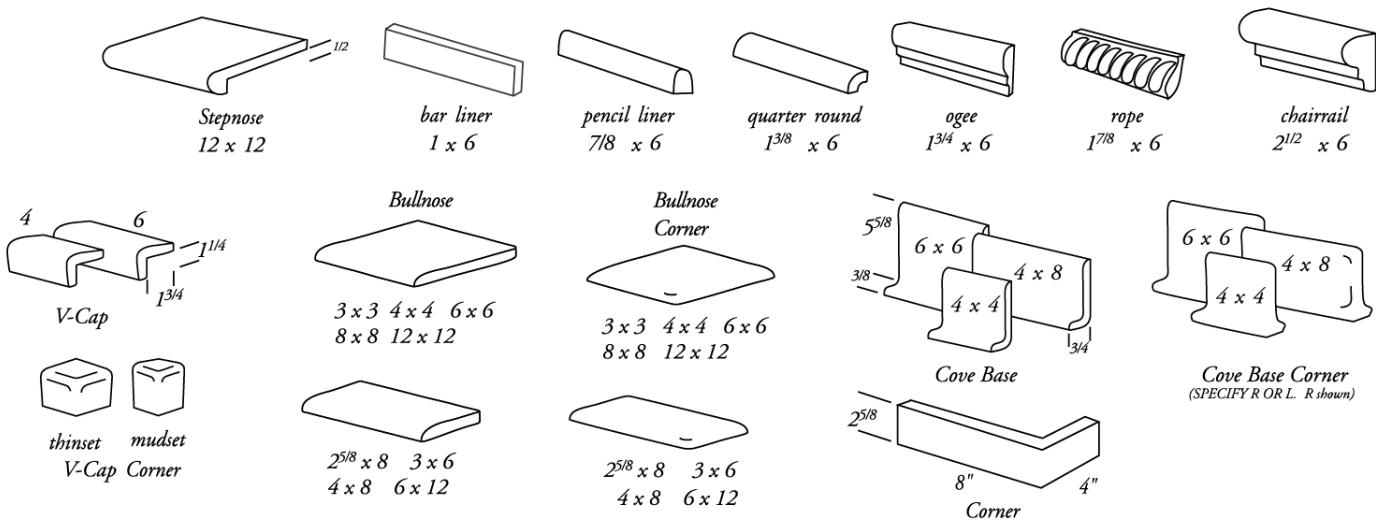

Quarry Pavers



TECH NOTES

SIMPLE GUIDELINES TO ASSURE THE BEAUTY & PERFORMANCE OF YOUR TILE.

Quarry Pavers are manufactured to ensure the highest quality of "hands on" craftsmanship. Our distinctive, one-at-a-time, stamping process creates a "relaxed" square edge and corner. Minor surface and shade variations help provide the unique character which sets our pavers apart from the mechanical appearance of other mass-produced products. Only the shale and clay clays are blended together to provide the dense, durable body necessary for use in interior and exterior applications. (Glazed tiles are not recommended for exterior horizontal use.) Glazed and Unglazed Quarry Pavers may be combined to create even more sophisticated design projects.

Unglazed Quarry Pavers are intended to provide the feeling of an old, authentic brick with all its desirable, inherent imperfections and variations. Because of the nature of this product, minor surface blemishes will be more apparent in a new installation than in one that is allowed to age naturally. The use of contrasting grout colors may further accentuate these variations. Washing and use will, over time, impart a natural patina and diminish any minor imperfections so your own unique look.

MAINTENANCE: Regular cleaning is easy, just sweep regularly and damp mop as necessary, using warm water and a neutral cleaner. To clean stubborn spots or grout joints use a stiff natural bristle brush. To clean stubborn spots and grout joints, use a stiff natural bristle brush.

ORDERING: Most tile is packed in cartons containing 10 square feet.

AVAILABILITY: Large inventories are maintained allowing timely deliveries; however due to the broad offering of shapes and sizes, some orders may have to be made.

INSTALLATION: Refer to the Tile Council of North America publication, Handbook for Ceramic Tile Installation, and follow instructions for your Quarry Pavers. Tiles are made in such a way as to assure their originality. Variations from samples and within a shipped lot are to be expected. All Quarry Pavers Tiles are nominally sized; this means that a 6" x 6" tile will be 5 5/8" x 5 5/8" design size, all tiles sold assume a 3/8" grout joint. Because of the handcrafted nature of our tiles, all dimensions given are

TEST RESULTS: Glazed and Unglazed

Technical Data	Requirement	
Water Absorption	Less than 30% for vitreous	
Breaking Strength	250 lbs. min.	Exceeds
Bond Strength	50 P.S.I.	Exceeds
Thermal Shock	No shivering/disintegration	
Abrasive Hardness*	35 min.	
Coefficient of Friction*		
Dry Leather .60 min. (ADA)	Exceeds	
Dry Rubber .60 min. (ADA)	Exceeds	
Wet Leather .60 min. (ADA)	Exceeds	
Wet Rubber .60 min. (ADA)	Exceeds	
*Unglazed tile only		

approximate. Custom sizes, shapes and glazes are available. Contact a factory representative for details. For additional slip and/or wear resistance on Glazed Quarry Pavers and Satins, an optional abrasives available.

LEED & GREEN INFORMATION

We are proud of the way we treat the environment by using clays sourced within 100 miles of our facility that are then minimally processed from their natural state through to the product. This fact may aid in LEEDS points awarded for regionally manufactured materials. (LEED Categories 5.1 &/or 5.2) Ceramic tiles by their very nature are inert, noncombustible, nontoxic and are completely free of any volatile organic compounds. Further, ceramic tiles allow for the use of low VOC adhesives & grouts that will not reduce indoor environmental air quality.

We recycle a waste product of coal ash electricity production into the body of many of our unglazed tiles.

Additionally, we reclaim our own liquid waste glaze residue and our scrap clay and put it back into our clay body, which makes our already dense clay body all the more durable. Heat captured from our kilns is used to dry our tiles prior to as well as heat much of our plant during cooler months. These measures not only help maintain the environment, but eliminate several items from the waste stream.

Even our off grade tiles are stacked in our yard and picked over endlessly by residential and commercial users alike to create their own individual masterpieces so they never end up in a landfill. The recycled use of post-industrial materials in our tiles, the low impact manufacturing methods we use, products we make with abundant, local raw materials, and the reclamation of much of our own waste help us achieve our goal to help keep our environment clean and safe.

Quarry Pavers conform to ANSI 137.1 as Special Purpose Tile. Our tiles are produced, graded and packed to our stated. When requested by the purchaser prior to production, a Master Grade Cer may be issued certifying compliance with properties mutually agreed upon by purchaser and Seneca Tiles Inc.

Quarry Pavers Tile
Less than 3%

No shivering/disintegration
Exceeds



COUNTRY FLOORS®

A Marble Systems company